

ADVANCED PRESSURE CONTROLLER LITE DATASHEET



Elveflow Advanced Pressure Controller Lite is a one channel pressure regulator module, with one sensor connection.

Table of content

General specifications..... 3

Pneumatic specifications..... 4

Electrical specifications..... 5

Communication specifications..... 5

Control and monitoring..... 5

Dimensional drawing..... 6

Connections..... 6

 Sensor wiring..... 7

 M12 Pin out..... 7

Assembly recommendations..... 8

 Assembly on standard perforated sheet metal..... 8

 Assembly with brackets..... 8

General specifications

Dimensions (mm)	124 x 49 x 70 mm
Weight (g)	310 g
Control Center connection	M12 8 pins (shielded cable 25 cm recommended)
Sensor communication	I2C, analog
Sensor connection	M8 4 pins (shielded cable 1 m recommended), or Terminal block (4 wires)
Sensor compatibility	Elveflow sensors (MFS, MPS, bubble detector and MFP), Analog sensors with 0/10 V input signal and with up to 24 V supply
Number of sensor connections	1
Casing material	Aluminium
Mounting orientation	Any

Pneumatic specifications

Channel pressure range	0 to 5000 mbar (0 to 72.5 psi)
Pressure stability	0.2% FS
Repeatability	0.5% FS
Response time	6 s
Settling time	10 s
Stabilization time	20 s for rising pressure, 120 s for falling pressure
Air consumption at rest	< 0.01L/min
Input pneumatic connector	4 mm push-in
Output pneumatic connector	4 mm push-in
Pressure supply	5.5 bar (or Max pressure + 0.5 bar) to 10 bar Non corrosive, non explosive, dry and oil-free gases, e.g. air, argon, N2, CO2, ...

Electrical specifications

Maximum power (W)	5 W
Typical power (W)	2.4 W
Digital sensor supply voltage (V)	5 V
Analog sensor supply voltage (V)	5 to 24 V
Maximum sensor power (W)	2 W

Communication specifications


Interface	M12 8 pins
Communication type	Universal Asynchronous Receiver-Transmitter (UART)
Serial communication speed	230400 bauds

Control and monitoring


UART commands	Pressure regulation/ Flow regulation by feedback loop with flow sensor/ Volume injection with flow sensor/ Sensor configuration & monitoring
Software control	ESI via a Control Center only
Data management	Custom pressure regulation waveform : <ul style="list-style-type: none"> - 4 available custom waveforms - 10 ms time step - 6000 available points per waveform
Distributed PI regulation between a regulators module and a sensor on another module	Yes

Dimensional drawing

(Dimensions in mm)

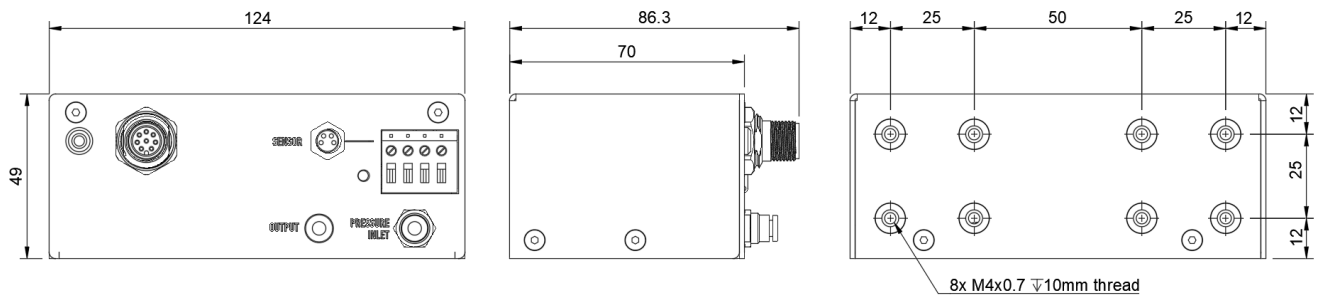


Connections

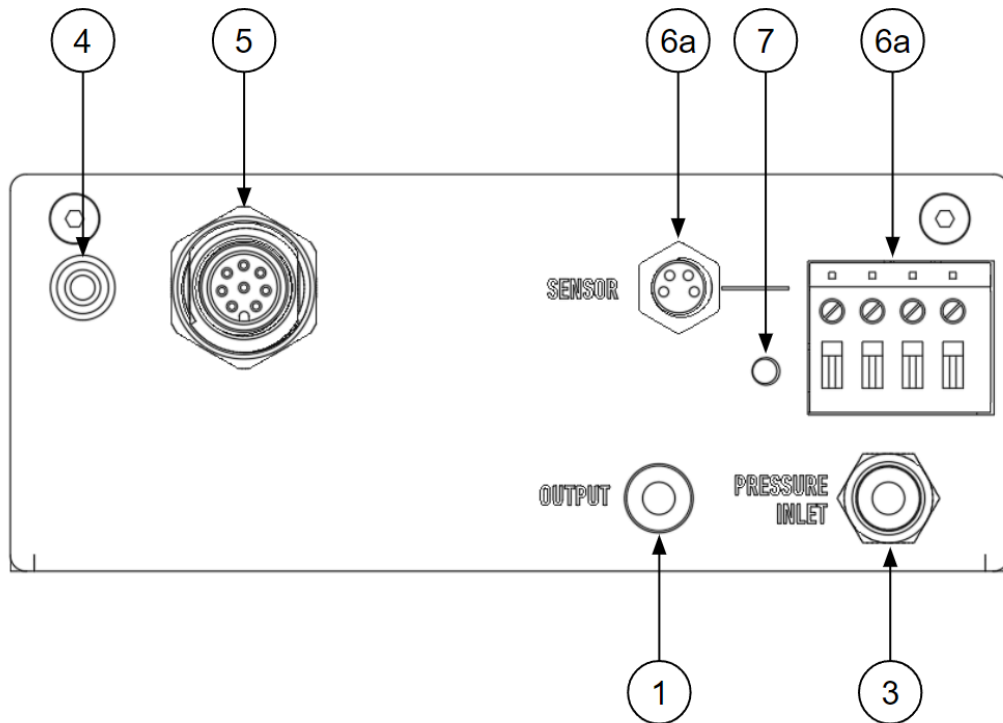

1	Pressure output	4mm push-in
3	Pressure input (10 bar max)	4mm push-in
4	Communication LED	Green LED - ON when communicating
5	Connection to Advanced Control Center (or Hub)	M12 male - 8 pins
6	Sensor connection	6a : M8 female 4 pins
		6b : Terminal block 4 pins
7	Sensor LED	Green LED - ON when sensor is communicating


Sensor wiring

1	Vcc 5-24V (power supply)
2	SCL (clock line for I2C)
3	Ground
4	Data line (Analog signal / SDA for I2C)

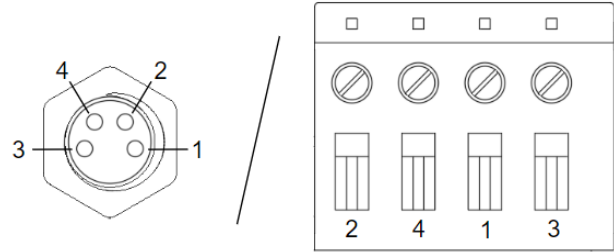

M12 Pin out


1	RX
2	TX
3	Ground
4	/
5	5V DC
6	/
7	Ground
8	24V DC

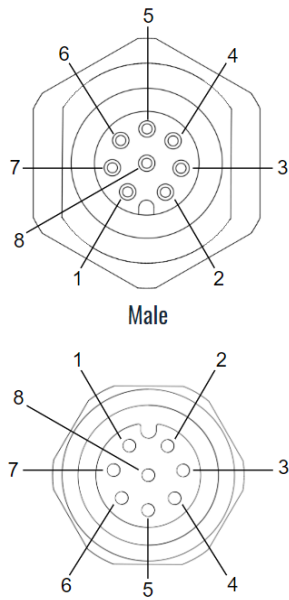

Assembly recommendations

The module can be used in any orientation.

Assembly on standard perforated sheet metal

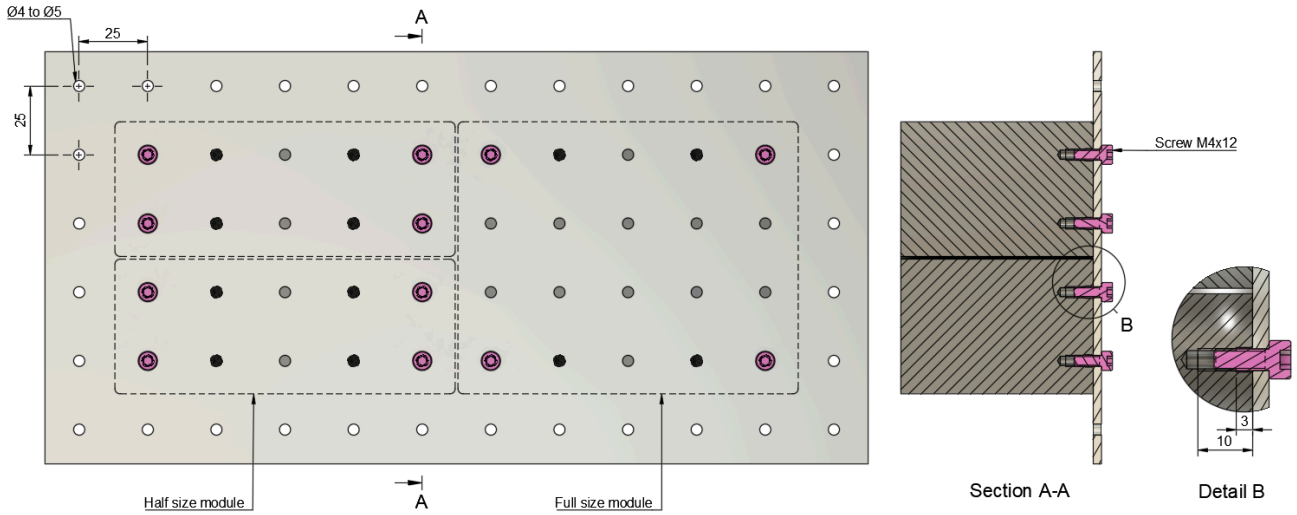

Assembly with brackets

Brackets are Elveflow custom parts that can be purchased with an Advanced system to assemble the modules together (see Advanced Assembly kit).

